



## T-LINE SAFETY SYSTEM



# Specifications





## MODEL T01L

MAXIMUM SPAN	24m
MAXIMUM VERTICAL RANGE	
@ 24m	20m
@ 18m	18m
@ 12m	12m
MAXIMUM FALL ARREST DISTANCE	1.8m
MAXIMUM FALL ARREST FORCE	6kN
ANCHORAGE RATING REQUIREMENT	19kN
WIRE ROPE MIN BREAKING FORCE (5mm diameter, 7x19 Strand)	17kN
WEIGHT	27.5kg

Conforms to EN360 

## FALL CLEARANCES AND SAFE WORK LIMITS

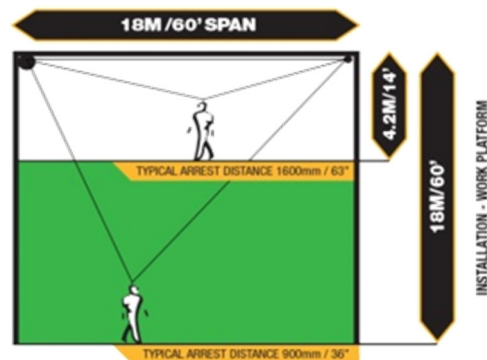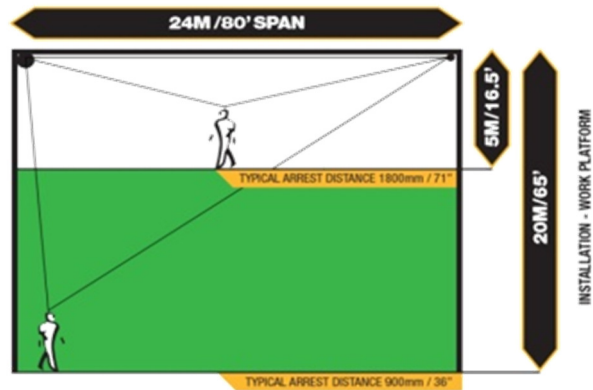

Bettersafe International BV, Azewijnseweg 12 SF, 4214 KC  
Vuren, The Netherlands

t | + 31(0) 183 820 280  
e | [info@bettersafeinternational.com](mailto:info@bettersafeinternational.com)  
w | [www.bettersafeinternational.com](http://www.bettersafeinternational.com)